




Residential and Commercial Gas Burner Flame Retention Power Gas Burner: SU-2

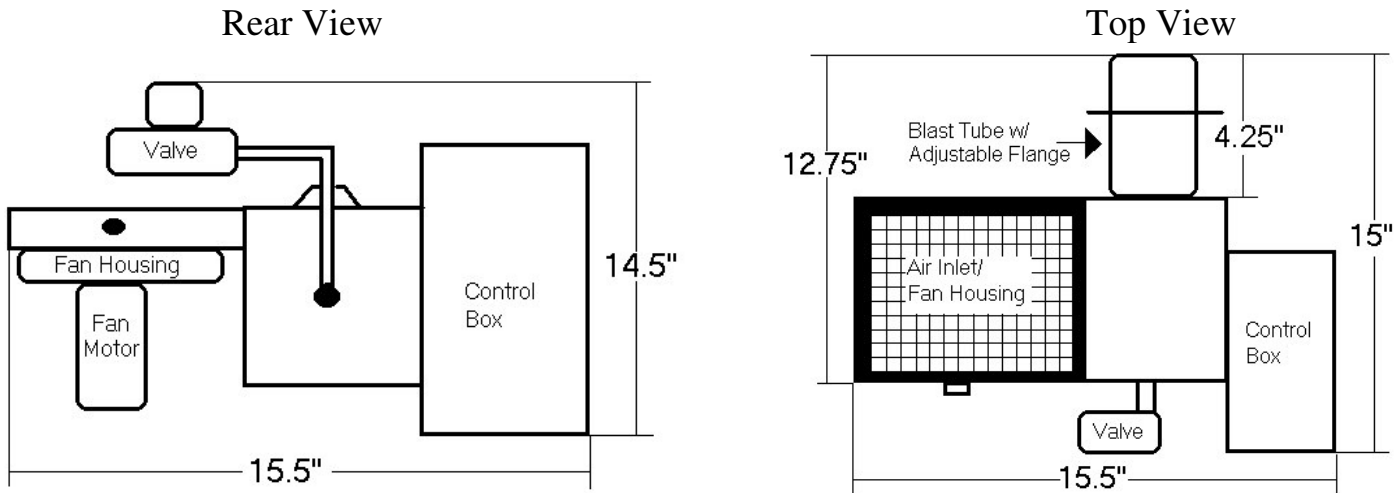

NOTE: The above measurements are maximum measurements. Depending on the components used, the measurements may vary.

Burner Model	Tube Length	Fuel	Capacity in BTU/H		Auxiliary Electric Power		Total Amps	Gas Conn.	Weight	Listing
			Min	Max	Primary	Secondary				
SU-2	4.25" or 8.25"	Nat/LP US/ Canada	80,000	200,000	120V 60Hz 1PH	24V	3 or less	1/2"	34 lbs.	

- The SU-2 is a direct spark, partial pre-mix, flame retention head, power gas burner.
- Fixed head for easy set up – No adjustment!
- Suitable for OEM applications, oil to gas conversions and retrofits.
- Remote Control Box available for OEM applications.
- Firing rate adjusted by orifice change.
- Fenwal 2466H is the standard control; Honeywell S89F is available.
- Honeywell gas valve standard.
- The SU-2 is used in a variety of applications, such as: residential heating, process heating, bakery ovens, smoke houses and incinerators.

Mass. Plbg Board # G1-0903-40:09/03/2004

NYC Dept. of Buildings MEA # 363-99-E

Heat Wise, Inc.
1528 Rocky Point Road
Middle Island NY 11953
P: (631)-345-0447
F: (631)-345-0451
www.heatwise.com